Buckingham Mfg. Co., Inc.

OX BLOCK™ Ease the Load

OVERVIEW


The new Buckingham OX BLOCK™ is a rope snatch block with an integrated friction bar used for hurt man rescue, lowering loads, snubbing loads, and raising loads. It allows the rigging professional to handle loads with greater control. When lowering loads, tension is transferred from the worker to the OX BLOCK™. The OX BLOCK™ replaces standard handline blocks, parted blocks, and various snatch blocks. The OX BLOCK™ also has greater Working Load Limits than blocks of similar size.

Model 50061
Patent Pending



WLL Eye to Sheave: 2500 lbs.

WLL Eye to Friction Bar: 1500

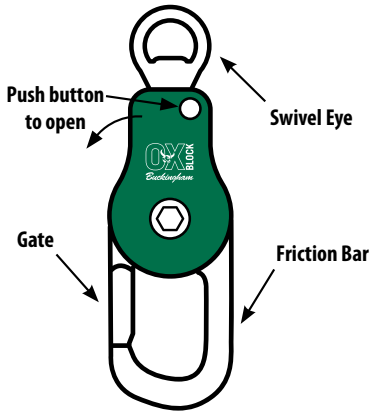

Model 50061A-4





Model 50061A-4: OX BLOCK™ with an attached 4' x 5/8" adjustable sling and an aluminum carabiner.
Model 50061A-7: OX BLOCK™ with an attached 7' x 5/8" adjustable sling and an aluminum carabiner.
Model 50061B: OX BLOCK™ only with an aluminum carabiner.

WATCH THE VIDEO

www.buckinghammfg.com/OX



Model 50061A-4/80

Model 50061A-4/80: OX BLOCK™ with an attached 4' x 5/8" adjustable sling, an aluminum carabiner and an 80' x 1/2" handline assembly.*
Model 50061A-4/100: OX BLOCK™ with an attached 4' x 5/8" adjustable sling, an aluminum carabiner and an 100' x 1/2" handline assembly.*
Model 50061A-7/80: OX BLOCK™ with an attached 7' x 5/8" adjustable sling, an aluminum carabiner and an 80' x 1/2" handline assembly.*
Model 50061A-7/100: OX BLOCK™ with an attached 7' x 5/8" adjustable sling, an aluminum carabiner and an 100' x 1/2" handline assembly.*
***Handline hook MBS 500lbs. and handline snap MBS 750lbs. Not To Be Used For Human Support.**

Buckingham SINCE 1896

www.buckinghammfg.com
1-800-YES-BUCK (937-2825)
Made In The U.S.A.

Buckingham Mfg. Co., Inc.

CONFIGURATIONS

Figure 1:
Common

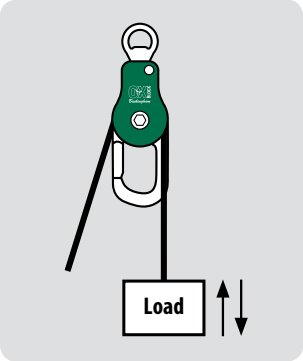


Figure 2:
Hurt Man Rescue & Lowering Load With Friction

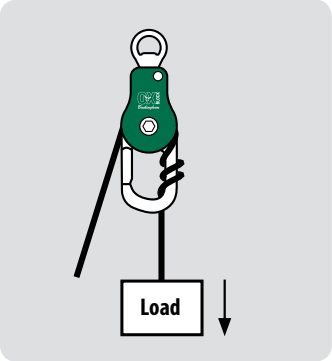


Figure 3:
Snubbing Load


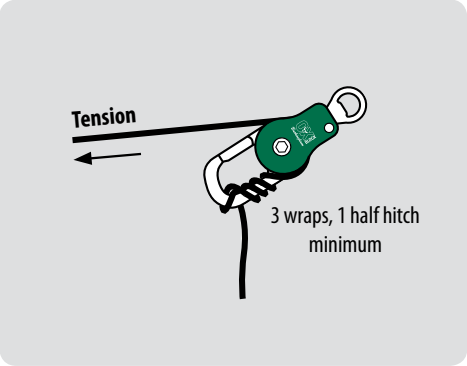


Figure 4:
Raising Load



When configured with optional pulleys, the OX BLOCK™ can be used to create a 4:1, 5:1 or 6:1 mechanical advantage reducing the amount of force needed to lift heavy loads. The advantage of the pulleys used by Buckingham is the swivel side plate that allows for quick and easy rope installation without removing pulley from the connecting device.

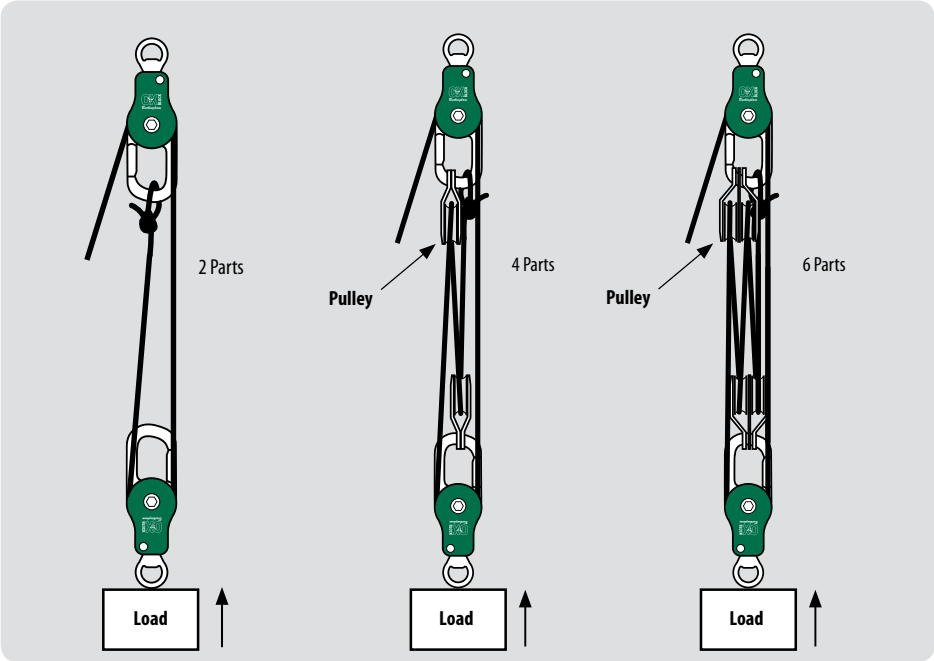

Model 5007R1:
Single sheave pulley with swivel eye. 1/2" rope capacity.
WLL: 1800lbs.



Model 5007R2:
Double sheave pulley with swivel eye. 1/2" rope capacity.
WLL: 1800lbs.

OX BLOCK™ ACCESSORIES



Model 39078TAG1-4

Model 39078TAG1-4: 4' x 5/8" adjustable sling.
Model 39078TAG1-7: 7' x 5/8" adjustable sling.
WLL: Straight 3200lbs.
Choker 2560lbs.
Basket 6400lbs.



Model 5555S3:
Aluminum triple action carabiner. Meets ANSI Z359.12 standards.
MBS 6750lbs.

www.buckinghammfg.com
1-800-YES-BUCK (937-2825)
Made In The U.S.A.